

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 375 231
A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **89312877.7**

(51) Int. Cl.⁵: **H01L 23/48, H01L 23/14,
H01S 3/025**

(22) Date of filing: **11.12.89**

(30) Priority: **21.12.88 US 287778**

(43) Date of publication of application:
27.06.90 Bulletin 90/26

(84) Designated Contracting States:
DE ES FR GB NL

(71) Applicant: **AMERICAN TELEPHONE AND
TELEGRAPH COMPANY**
550 Madison Avenue
New York, NY 10022(US)

(72) Inventor: **Dietrich, Norman Ralph**
R.D. Nr. 8, Box 471
Allentown Pennsylvania 18104(US)
Inventor: **Moyer, Ralph Salvatore**
R.D. Nr. 2, Box 2030
Mohnton Pennsylvania 19540(US)
Inventor: **Wong, Yiu-Huen**
160 Woodland Avenue
Summit New Jersey 07901(US)

(74) Representative: **Buckley, Christopher Simon**
Thirsk et al
AT&T (UK) LTD. AT&T Intellectual Property
Division 5 Mornington Road
Woodford Green, Essex IG8 0TU(GB)

(54) **Silicon-based mounting structure for semiconductor optical devices.**

(57) A silicon-based laser mounting structure is disclosed which provides improved interconnection between a semiconductor optical device, such as a laser, and an external high frequency modulation current source, by reducing the presence of parasitic inductive elements in the interconnecting network. The structure includes a stripline transmission path formed by depositing metal conductive strips on the top and bottom surfaces of a silicon substrate. The conductive strips are coupled at one end to the external modulation current source. A thin film resistor is deposited between the second end of the top conductive strip and the semiconductor optical device. This thin film resistor is utilized to provide impedance matching between the optical device and the stripline. That is, for a laser with an impedance Z_L , and a stripline designed to have an impedance Z_S , the resistance R is chosen such that $R + Z_L = Z_S$. Utilizing silicon processing techniques, the thin film resistor may be placed adjacent to the laser, reduc-

ing the parasitics associated with their interconnection. A conductive via is formed through the substrate to provide a top-side bonding location for connecting the optical device to the bottom metal conductor. By providing the top-side site, the parasitic inductance associated with this interconnection is considerably reduced.

EP 0 375 231 A2

SILICON-BASED MOUNTING STRUCTURE FOR SEMICONDUCTOR OPTICAL DEVICES

Background of the Invention

Technical Field

The present invention relates to a semiconductor optical device mounting structure and, more particularly, to a silicon-based stripline structure for providing an interconnection between the semiconductor optical device and a high frequency modulation current source.

2. Description of the Prior Art

Semiconductor optical devices, such as lasers and light emitting diodes (LEDs), are used in a wide variety of applications, due to their compactness, relatively high efficiency, and well-controlled output. However, a number of requirements are imposed upon these devices. For durability, cooling of the optical device is necessary, since prolonged high temperature operation can seriously damage and even destroy the device. Further, since the output light intensity from the device is a function of its junction temperature, the supporting structure must be able to dissipate the tremendous amount of heat generated by the high current density in the device in its operating state.

While it is relatively simple to solve these temperature related problems (by use of a thermoelectric cooler, for example), other problems develop when a semiconductor optical device is operated at extremely high bit rates, for example, above 1 Gb/s. At these speeds, the low impedance of the laser relative to that of the modulation current source, as well as the parasitics associated with the interconnecting network, become critical factors. Minimizing these parasitics by matching the network impedance to the optical device impedance over a broad bandwidth must be performed in order to achieve acceptable performance. It is well-known that semiconductor devices such as lasers exhibit an impedance in the range of 2-8 Ω , while most high frequency modulation current sources have a relatively high output impedance ($\gg 50\Omega$, typically). The impedance mismatch between the laser and the modulation current source would cause multiple reflections of the signal from the laser and consequently severe distortion in the signal waveform applied to the laser. This distortion in turn, degrades the bit error rate (BER) of the system incorporating the laser. One

approach to this problem is disclosed in U. S. Patent 4,097,891 issued to P. R. Selway et al. on June 27, 1978. Selway et al. disclose a particular laser stud mount design which utilizes a stripline (a conductive strip held between a pair of ceramic annuli) as one terminal connection for the laser. The stripline may then be correctly sized (in terms of thickness and width) to provide impedance matching between the signal source and the laser.

A problem with this approach is that since every laser exhibits a slightly different impedance (related to processing variations), each stripline of the Selway et al. design would have to be individually designed to match the particular laser to which it is being coupled. Further, in trying to use the stripline to directly match the impedance of the laser to the modulation current source, other problems develop. In general, to provide impedance matching, the ideal solution is either to decrease the impedance looking back from the laser to the source (so that the source appears to the laser as an equivalent load) or, alternatively, to increase the resistance of the laser as seen by the supply. For many reasons, however, these alternatives are impractical, if not impossible. In particular, to decrease the source impedance as seen by the laser would require the use of an extremely thin stripline, making the device too fragile for practical applications. In contrast, providing a stripline which increases the laser's impedance would greatly increase the necessary voltage swing of the modulation current source required to deliver the same current to the laser. Additionally, these arrangements, by nature of their design, introduce parasitic inductive elements into the interconnection network. At high bit rates, greater than 1Gb/s, for example, these parasitics seriously load the signal being applied to the laser and severely degrade the performance of the system.

Thus, a need remains in the prior art for a means of interconnecting a semiconductor optical device to a high frequency modulation current source which allows the laser to operate at high bit rates, e.g., speeds exceeding 1Gb/s without introducing excessive parasitic inductive elements into the interconnecting network.

Summary of the Invention

The need remaining in the prior art is addressed by the present invention which relates to a mounting structure for semiconductor optical devices and, more particularly, to a silicon-based stripline structure for providing an interconnection

with improved impedance matching between the optical device and a high frequency modulation current source.

It is an aspect of the present invention to provide a stripline interconnection with reduced parasitic elements comprising a silicon substrate as the dielectric, with the top and bottom surfaces of the silicon metallized to form the signal and ground conductors of the stripline. The thickness of the silicon substrate and the width of the signal conductor are chosen to provide a stripline having the desired characteristic impedance, as will be described in detail below. A deposited resistance feature, such as a thin film deposit, is formed on the silicon surface adjacent to the laser, where the value of the resistance feature is chosen such that the combination of this resistance R with the impedance Z_L of the laser will essentially match the characteristic impedance Z_0 of the stripline ($R + Z_L = Z_0$). The value of the deposited thin film resistor may be individually tailored such that matching will be provided, regardless of the laser's specific resistance. By forming the resistor adjacent to the laser, the value of the parasitic inductor associated with the spacing between these two elements will be significantly reduced.

An advantage of the present invention is that the interconnection is silicon-based, allowing well-known silicon processing techniques to be used in the formation of the laser/modulation source interconnection. In particular, a metallized via is formed through the silicon substrate to facilitate the interconnection of the bottom conductor of the stripline to the top side of the laser chip. The use of the via technique has been found to significantly shorten this interconnection (otherwise formed by means of a number of wirebonds). The length of these wirebond interconnections increases the parasitic inductance of the interconnection and therefore becomes a serious concern at high bit rates. Shortening these interconnection paths in accordance with the invention decreases the parasitic elements mentioned above, thus providing improved performance of the mounted laser, in terms of bandwidth. Additionally, the silicon fabrication techniques allow for the impedance matching resistor to be formed adjacent to the laser. This close placement thus reduces parasitics by reducing the spacing between the resistor and the laser. Further, the silicon-based stripline mounts may be produced in mass quantities, with thousands being included on a single wafer. This volume represents orders of magnitude increase in fabrication efficiency over previous arrangements which used ceramics or other materials and required individual fabrication. The commensurate savings in expense is obvious.

Other and further advantages of the present invention will become apparent during the course

of the following discussion and by reference to the accompanying drawings.

5 Brief Description of the Drawing

Referring now to the drawings, where like numerals represent like parts in several views:

FIG. 1 illustrates an exemplary silicon-based stripline mount formed in accordance with the present invention;

FIG. 2 is an electrical circuit equivalent of the stripline of FIG. 1; and

FIGS. 3-11 illustrate a series of exemplary fabrication steps which may be used to form the silicon-based stripline laser mount of the present invention.

20 Detailed Description

A silicon-based stripline mount 10 of the present invention for providing an interconnection between a semiconductor optical device and a high frequency modulation current source is illustrated in FIG. 1. As shown, an exemplary semiconductor optical device, such as a laser 12 and impedance matching resistor 14 are located on the top surface 17 of a silicon substrate 16. It is to be noted that although the following describes a mount for a semiconductor laser, a similar mount formed in accordance with the present invention may be utilized with other semiconductor optical devices, such as edge-emitting LEDs. As will be described in detail hereinafter, the thickness t of substrate 16 is chosen to provide the desired characteristic impedance Z_0 of the transmission line. First and second conductors 18 and 24 provide, in conjunction with substrate 16, a first transmission line section A from the edge of mount 10 to resistor 14, where conductors 18 and 24 are coupled to separate terminal connections of the external modulation current source (not shown). The width w of first conductor 18 is also a factor in determining the impedance Z_0 of the stripline. It is to be noted that the terms "stripline" and "transmission line" are being used interchangeably, where it is to be understood that a stripline as formed in accordance with the present invention is one type of communication link categorized as a transmission line.

A second, relatively small transmission line section B provides the connection between resistor 14 and a first side (for example, n-side) of laser 12. Second section B is formed by the combination of metal layer 26, substrate 16, and second conductor 24. As mentioned above and described in more detail below, resistor 14 is positioned adjacent to laser 12 so as to minimize the effect, in terms of

impedance mismatch introduced by inductive parasitic elements, between resistor 14 and laser 12 by minimizing the length of transmission line section B. A metallized via 20 is utilized in conjunction with a metal contact 22 to provide the electrical connection between the top layer (p-side, for example) of laser 12 and second conductor 24. An advantage associated with using metallized via 20 to provide the electrical connection to laser 12 is that the stripline transmission quality of the input signal applied to laser 12 is maintained. In fact, by wirebonding the top side of laser 12 to metal contact layer 22, it can be imagined that the stripline formed by sections A and B as described above actually wraps around laser 12 to connection the top of laser 12 to second conductor 24. Additionally, the use of the conductive via further decreases the parasitic inductance of the connection to the top side of laser 12, by providing a bonding pad site (metal conductor 22) on the top side of substrate 16, rather than requiring the formation of a relatively long wirebond connection all the way from the top side of laser 12 to second conductor 24.

As is well-known, the physical dimensions t and w are controlled to provide the desired stripline impedance Z_s for a substrate 16 of known permeability μ and permittivity ϵ . For example, for a desired impedance $Z_s = 25\Omega$, with $\epsilon = 12$ and $\mu = 1$, a silicon thickness t of 0.010 inches, and a first conductor width w of 0.030 inches are appropriate.

An equivalent circuit representation of mount 10 is illustrated in FIG. 2. As discussed above, utilizing the stripline to provide direct impedance matching from laser 12 ($Z_L = 5\Omega$) to the external modulating current source ($Z_E \gg 50\Omega$) over a wide bandwidth (for example, from a few kHz to several GHz) is virtually impossible. Accordingly, a viable compromise is to utilize a stripline with a characteristic impedance Z_s in the range between these two extremes, i.e., $Z_L < Z_s < Z_E$, while insuring that $Z_L + R = Z_s$ with minimum parasitics. A typical value for Z_s , as illustrated in FIG. 2, is 25Ω . Since the external modulating current source impedance cannot be matched to the stripline, it is essential that the stripline and laser be matched as closely as possible to avoid the multiple signal reflections and resulting waveform distortions described above. Referring to FIG. 2, laser 12 is illustrated as having an impedance Z_L of 5Ω (typical value). Therefore, to provide impedance matching to the stripline, resistor 14 is sized to have an impedance $R = 20\Omega$. In practice, trimming may be used to size resistor 14. The series combination of $R + Z_L$ thus provides an impedance of 25Ω , matching the characteristic impedance Z_s of stripline section A.

An exemplary fabrication process for forming a

silicon-based stripline laser mount will be described below in association with FIGS. 3-11. It is to be understood that this process is exemplary only and there exist various other techniques of creating the stripline mount structure depicted in FIG. 1. Further, although only one such mount is illustrated in the following figures, thousands of such mounts are actually being fabricated simultaneously on a single silicon wafer.

Mount 10, in an early stage in its fabrication process, is illustrated in FIG. 3. A (100) silicon substrate 16 is formed so as to have a $\langle 110 \rangle$ orientation as a lithographic reference, so as to aid in later steps in the fabrication process. A relatively thick oxide layer 30 is grown (or deposited) on top surface 17 of substrate 16. Similarly, a thick oxide layer 32 is formed on bottom surface 15 of substrate 16. Oxide layers 30 and 32 may be formed simultaneously. A layer 34 of resistive material, tantalum nitride, for example, is next deposited to cover oxide layer 30. Layer 34 may be deposited utilizing plasma-enhanced chemical vapor deposition (PECVD) techniques to comprise a thickness of approximately 600\AA . The thickness of layer 34 is related to the relative range of resistivities required to perform impedance matching of the laser to the stripline, where Ta_2N is known to comprise a resistivity of $640\Omega/\square$. A photoresist layer 35 is next deposited on resistance layer 34 so as to delineate the final position of the thin film matching resistor.

The structure of FIG. 3 is then illuminated and the exposed portions of resistance layer 34 are removed. Photoresist 35 is subsequently removed to uncover impedance matching resistor 14, as illustrated in FIG. 4. Metallic conductor areas 18, 26 and 22 are next formed, where these areas may consist of tri-level structures of titanium, titanium nitride, and platinum; the titanium nitride being a relatively thin layer which is used to prevent the formation of the compound TiPt . The compound TiPt is resistant to etching and has been found to be problematic during subsequent operations. A layer of gold may then be deposited as the top layer of metal areas 18, 26 and 22, where a thicker layer of gold is usually formed on areas 18 and 22 which will serve as wirebond pad sites. In particular, area 18, also referred to as first conductor 18, is used as a wirebond connection site between the external modulation current source (not shown) and section A of the transmission line. Metal area 26 defines the location of laser 12 and provides the bottom side (e.g., n-side) contact to laser 12. The connection to the top side of laser 12 (e.g., p-side) is provided by a wirebond between the top of laser 12 and metal contact 22, where metal contact 22 is coupled through metallized via 20 to the bottom conductive layer 24 of mount 10 (see FIG. 1). It is to be noted that any of the wirebond connections

mentioned in the present context may actually consist of a number of parallel wirebonds or ribbon bonds. By using multiple bonds, the parasitic inductance of each separate bond, added in parallel, results in further reducing the overall parasitic inductance, another important means for reducing the parasitic inductance of the interconnection network. This technique is applicable to all of the illustrated wirebonds.

An exemplary process of forming metallized via 20 will now be described. A layer of photoresist 40 is deposited to cover oxide layer 32, with an opening 42 defining the location of via 20, as illustrated in FIG. 5. The portion of oxide 32 exposed by photoresist 40 is subsequently removed with an appropriate etch. The exposed surface of silicon substrate 16 is then etched with a substance which, by virtue of the (100) plane of the substrate, will form an inverted V-groove structure as illustrated in FIG. 6. That is, the etching substance will cause the substrate to etch along the $\langle 100 \rangle$ axis faster than the $\langle 111 \rangle$ axis, resulting in a pyramid structure bound by (111) planes. The etchant ethylenediamine pyrocatechol (EDP) is one known compound which will form this inverted V-groove structure. Silicon dioxide layer 30 acts as an etch stop for this process. Once the substrate has been etched, portion 30' of oxide layer 30 exposed by via 20, as well as oxide layer 32, are removed by an appropriate etch. The removal of portion 30' of oxide layer 30 thus exposes metal contact area 22 to via 20, as shown in FIG. 7.

The next step in the fabrication process is to form the metallized inner walls on via 20. For the particular process to be described, the metallization is accomplished in two separate process sequences. In the first sequence, a metal contact 44 is formed to cover the exposed bottom surface 15 of substrate 16, as well as covering the exposed sidewalls of via 20. For example, metal contact 44 may consist of a first layer of titanium 41 and a second layer of platinum 43, each layer being sequentially sputtered onto the bottom surface of the structure, as illustrated in FIG. 8. In this case, no intermediate layer of titanium nitride is required, since this combination of layers will require no further etching. As shown in FIG. 8, metal contact 44 is disposed to cover the inner walls of via 20 such that a portion of contact 44 (in this case, a portion of titanium layer 41) comes into direct contact with metal contact 22. This meeting of the two layers is extremely important, since the electrical coupling of layers 44 and 22 is required to provide the electrical connection to the top side of laser 12. It is to be noted that in the preferred arrangement, the bottom-most layer of metal contact 22 is also formed of titanium.

Subsequent to this metallization, a grinding (or

polishing) operation is performed to reduce the overall thickness of substrate 16 (in actuality, the measured thickness defines the complete dielectric thickness of substrate 16 and overlying oxide layer 30). As discussed above, a thickness t of approximately 0.010 inches (± 0.0001) is preferred and provides a stripline with an impedance of approximately 25Ω . However, if the substrate were initially formed to comprise this thickness, it would be too fragile to withstand many of the steps in the fabrication sequence as outlined above. Thus, substrate 16 is initially formed to comprise the conventional wafer thickness of 0.020 inches, where all of the fabrication steps are performed on a wafer of this thickness. Once via 20 has been metallized, the substrate may be thinned to the appropriate value. FIG. 9 illustrates mount 10 subsequent to this thinning operation. As shown, the horizontal portions of metal contact 44 will be completely removed, but the walls of via 20 remain metallized, as denoted 44' in FIG. 9.

Subsequent to the thinning operation, the exposed bottom surface 46 of substrate 16 is then metallized to form conductor 24 of mount 10. In one particular arrangement, conductor 24 may consist of a tri-level structure including a first layer 48 of titanium, a second layer 50 of platinum and a third layer 52 of gold. If these layers are deposited by a conventional sputtering technique, layers 48, 50 and 52 will cover not only exposed bottom surface 46, but will also fill in, to some extent, via 20.

Once this metallization has been completed, the wafer may be diced to separate the thousands of mounts so formed. The individual laser chips 12 are then mounted on metal contact 26 and the necessary wirebond connections are formed, as shown in FIG. 11.

Claims

1. An optical transmission arrangement including a semiconductor optical device having a predetermined impedance Z_L ; and mounting means for said semiconductor optical device

CHARACTERIZED IN THAT

the mounting means comprises

a silicon substrate of a predetermined thickness t and defined as having an inherent permittivity ϵ and permeability μ ;

a first metal conductor strip of a predetermined width w disposed to contact a portion of a first major surface of said substrate, with a first end of said first strip capable of being coupled to an external modulation current source;

a second metal conductor strip disposed to contact a portion of a second major surface of said substrate in a parallel relationship with said first conductor strip, with a first end of said second strip capable of being coupled to said external modulation current source, the combination of said substrate with said first and second conductor strips forming a stripline transmission path of a predetermined characteristic impedance Z_s ;

a resistive element deposited on said substrate adjacent to said semiconductor optical device and electrically connected in series between said stripline and said semiconductor optical device, said element having a predetermined resistance value R such that the combination of the resistance R with the optical device characteristic impedance Z_L is essentially equal to the stripline characteristic impedance Z_s ; and

said substrate including a metallized via for providing an electrical connection between said second metal conductor strip and said semiconductor optical device.

2. An optical transmission system as defined in claim 1 wherein the resistive element comprises a strip of tantalum nitride which is deposited on the first surface of the silicon substrate.

3. An optical transmission system as defined in claim 1 wherein the substrate comprises a thickness t and the first metal conductor strip comprises a width w , capable of forming a stripline with a characteristic impedance Z_s of approximately 25Ω .

4. An optical transmission arrangement as defined in claim 3 wherein the substrate thickness t is approximately equal to 0.010 inches, and the first metal conductor strip width w is approximately 0.030 inches.

5. An optical transmission arrangement as defined in claim 1 wherein the substrate comprises (100) silicon with a <110> lithographic orientation.

6. An optical transmission arrangement as defined in claim 1 wherein the first and second metal conductor strips each comprise tri-layer structures of titanium, platinum and gold.

7. An optical transmission arrangement as defined in claim 1 wherein the semiconductor optical device comprises a semiconductor laser.

8. An arrangement for providing coupling between a semiconductor optical device and a high frequency modulation current source, said arrangement comprising a silicon-based stripline which includes

a silicon substrate of a predetermined thickness t and defined as having an inherent permittivity ϵ and permeability μ ;

a first metal conductor strip of a predetermined width w disposed to contact a portion of a first major surface of said substrate, with a first end of said first strip capable of being coupled to said

high frequency modulation current source;

a second metal conductor strip disposed to contact a portion of a second major surface of said substrate in a parallel relationship with said first conductor strip, with a first end of said second strip capable of being coupled to said high frequency modulation current source, the combination of said substrate with said first and second conductor strips forming a stripline transmission path of a predetermined characteristic impedance Z_s ;

a resistive element deposited on said substrate adjacent to said semiconductor optical device and electrically connected in series between said stripline and said semiconductor optical device, said element having a predetermined resistance value R such that the combination of the resistance R with the optical device characteristic impedance Z_L is essentially equal to the stripline characteristic impedance Z_s ; and

said substrate including a metallized via for providing an electrical connection between said second metal conductor strip and said semiconductor optical device.

9. A coupling arrangement as defined in claim 8 wherein the resistive element comprises a strip of tantalum nitride which is deposited on the top surface of the silicon substrate.

10. A coupling arrangement as defined in claim 8 wherein the substrate comprises a thickness t and the first metal conductor strip comprises a width w capable of forming a stripline with a characteristic impedance Z_s of approximately 25Ω .

11. A coupling arrangement as defined in claim 10 wherein the substrate thickness t is approximately equal to 0.010 inches, and the first metal conductor strip width w is approximately equal to 0.030 inches.

12. A coupling arrangement as defined in claim 8 wherein the silicon substrate comprises (100) silicon with a <110> lithographic orientation.

13. A method of forming a silicon-based stripline for providing an interconnection between a semiconductor optical device and a high frequency modulation current source, said method comprising the steps of:

a) providing a silicon substrate;

b) depositing a thin film resistor on the top surface of said substrate;

c) forming a via through said silicon substrate at a spaced-apart location from said thin film resistor;

d) metallizing longitudinal portions of a first and second major surfaces of said substrate, as well as the via, the first metallization being of a predetermined width w , the combination of said first and second metallizations with said substrate thus forming a stripline transmission path with a characteristic impedance Z_s , and the via being

utilized to provide electrical connection between the second metallization and the semiconductor optical device.

14. The method according to claim 13 wherein in performing step b), tantalum nitride is deposited as the thin film resistor. 5

15. The method according to claim 14 wherein in performing step b), a plasma-enhanced chemical vapor deposition technique is utilized.

16. The method according to claim 13 wherein in performing step a), a (100) silicon substrate with a <110> lithographic orientation is provided. 10

17. The method according to claim 16 wherein in performing step c), the etchant ethylenediamine pyrocatechol (EDP) is utilized to form an inverted V-shaped via with respect to the first major surface of the substrate 15

18. The method according to claim 13 wherein in performing step d), the metallizations comprises a tri-level metallization of titanium, platinum and gold, deposited sequentially on said substrate. 20

19. The method according to claim 13 wherein in performing step d), a sputtering operation is used to deposit the metallizations. 25

30

35

40

45

50

55

FIG. 1

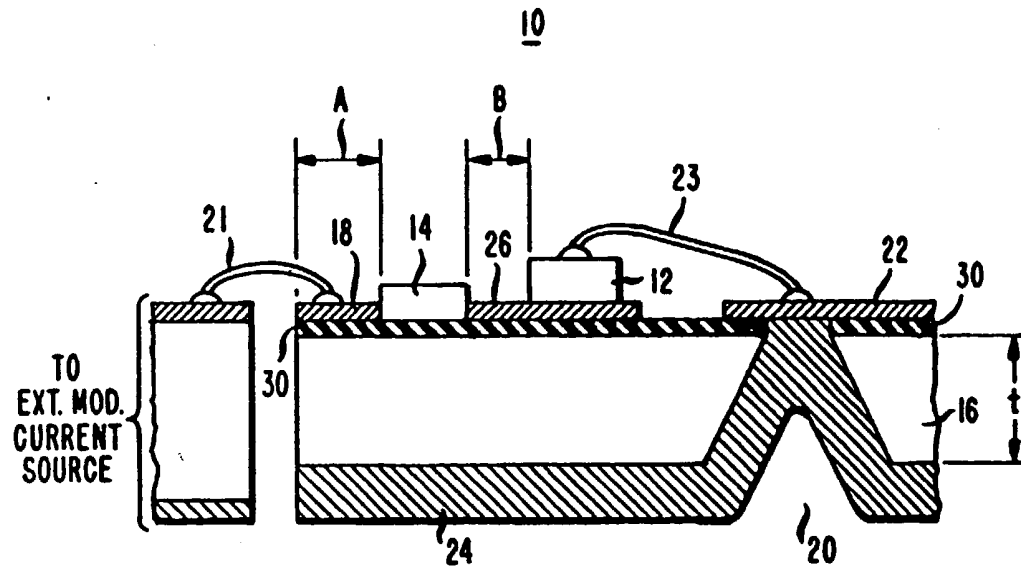


FIG. 2

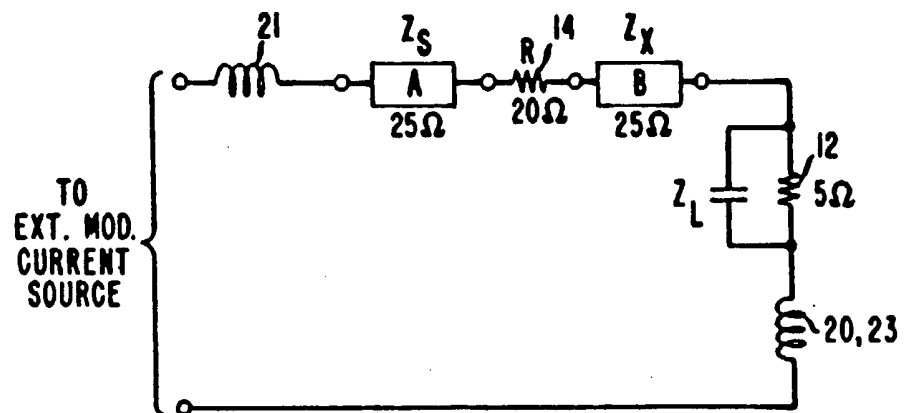


FIG. 3

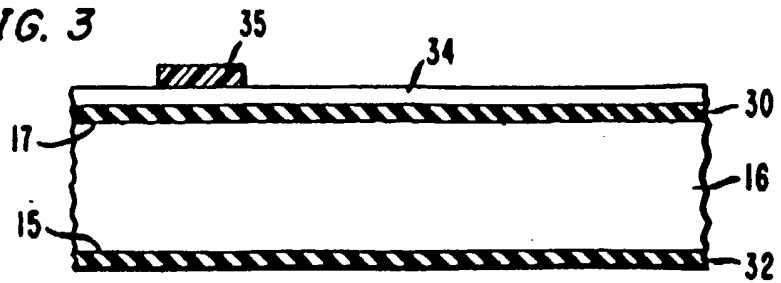


FIG. 4

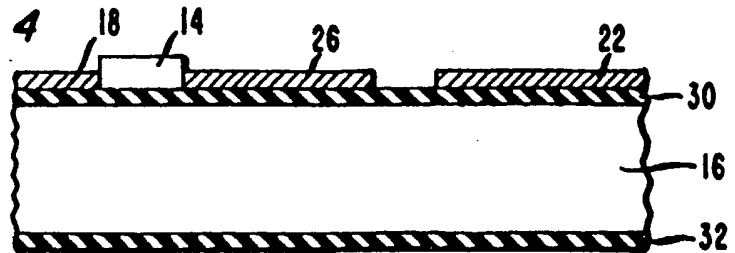


FIG. 5

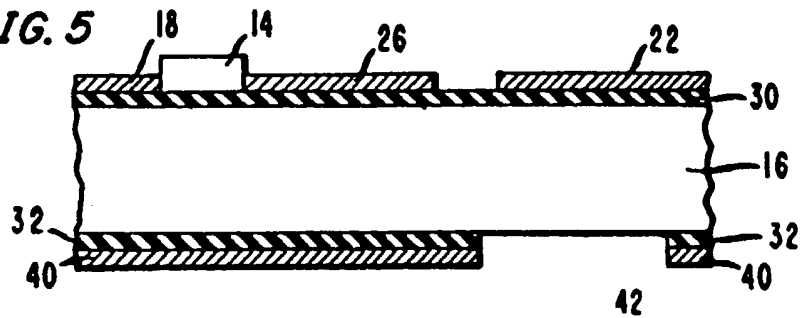


FIG. 6

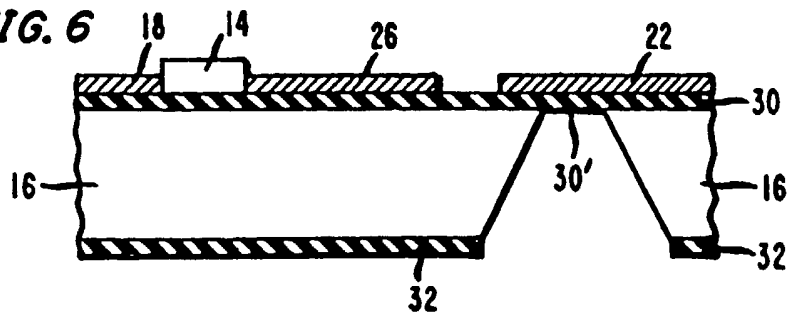


FIG. 7

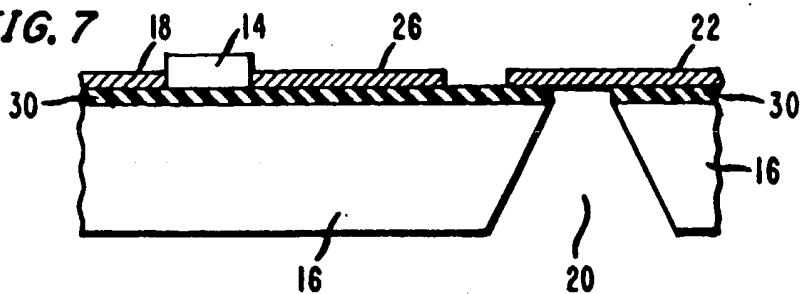


FIG. 8

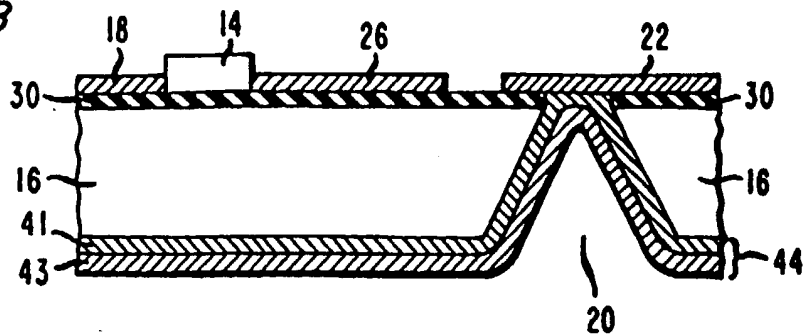


FIG. 9

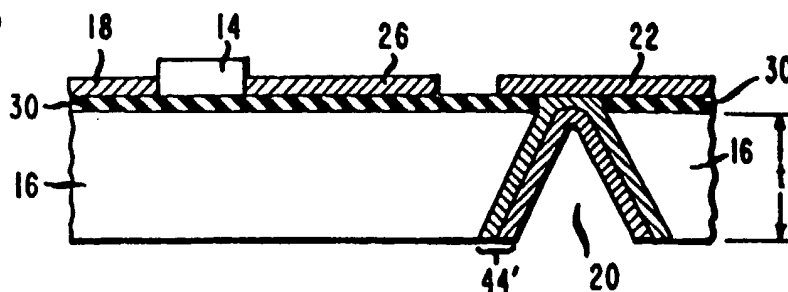


FIG. 10


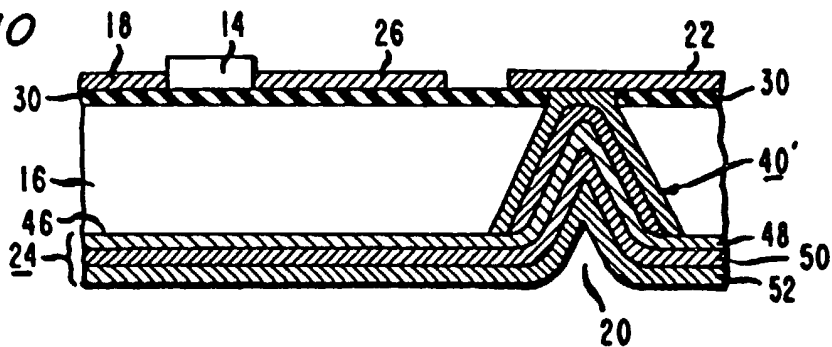


FIG. 11



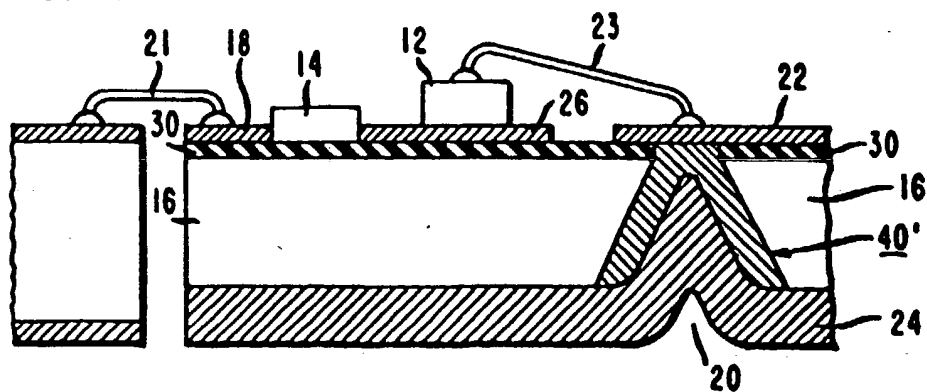

Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 375 231
A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89312877.7

(51) Int. Cl.⁵ **H01L 23/48, H01L 23/14,
H01S 3/025**

(22) Date of filing: 11.12.89

(30) Priority: 21.12.88 US 287778

(43) Date of publication of application:
27.06.90 Bulletin 90/26

(84) Designated Contracting States:
DE ES FR GB NL

(89) Date of deferred publication of the search report:
27.12.90 Bulletin 90/52

(71) Applicant: **AMERICAN TELEPHONE AND
TELEGRAPH COMPANY**
550 Madison Avenue
New York, NY 10022(US)


(72) Inventor: **Dietrich, Norman Ralph**
R.D. Nr. 8, Box 471
Allentown Pennsylvania 18104(US)
Inventor: **Moyer, Ralph Salvatore**
R.D. Nr. 2, Box 2030
Mohnton Pennsylvania 19540(US)
Inventor: **Wong, Yiu-Huen**
160 Woodland Avenue
Summit New Jersey 07901(US)

(74) Representative: **Buckley, Christopher Simon**
Thirsk et al
AT&T (UK) LTD. AT&T Intellectual Property
Division 5 Morningside Road
Woodford Green, Essex IG8 OTU(GB)

(54) **Silicon-based mounting structure for semiconductor optical devices.**

(57) A silicon-based laser mounting structure (10) is disclosed which provides improved interconnection between a semiconductor optical device, such as a laser (12), and an external high frequency modulation current source, by reducing the presence of parasitic inductive elements in the interconnecting network. The structure includes a stripline transmission path formed by depositing metal conductive strips on the top and bottom surfaces of a silicon substrate (16). The conductive strips are coupled at one end to the external modulation current source. A thin film resistor (14) is deposited between the second end of the top conductive strip and the semiconductor optical device. This thin film resistor (14) is

utilized to provide impedance matching between the optical device and the stripline. That is, for a laser (12) with an impedance Z_L , and a stripline designed to have an impedance Z_S , the resistance R is chosen such that $R + Z_L = Z_S$. Utilizing silicon processing techniques, the thin film resistor may be placed adjacent to the laser (12), reducing the parasitics associated with their interconnection. A conductive via is formed through the substrate (16) to provide a top-side bonding location for connecting the optical device to the bottom metal conductor, by providing the top-side site, the parasitic inductance associated with this interconnection is considerably reduced.

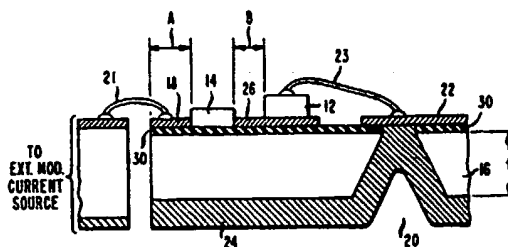

EP 0 375 231 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 31 2877

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	WO-A-8 702 834 (AMERICAN TELEPHONE & TELEGRAPH CO.) * Page 1, line 1 - page 3, line 3; page 3, line 15 - page 5, line 18; page 6, line 20 - page 8, line 15; figures 1-3 *	1-3, 7-10, 13, 14	H 01 L 23/48 H 01 L 23/14 H 01 S 3/025
A	US-A-4 751 562 (SHIGEYUKI YAMAMURA) * Column 4, line 27 - column 5, line 28; column 7, lines 12-30; figures 6A, 7A *	1, 8, 13	
A	US-A-4 485 361 (GERALD M. BENDER) * Column 2, line 41 - column 4, line 23; figures 1-4 *	1, 8	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
			H 01 L H 01 S
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16-10-1990	Examiner GNUGESSER H.M.
CATEG RY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			